

GRAU

Falling Leaf

Falling Leaf ist die lichtstarke Tischbeleuchtung. Die große Linse strahlt ein blendfreies Licht großzügig über den Tisch. Falling Leaf ist aus hochwertigem Aluminium gefertigt.

Falling Leaf bietet eine Reihe von cleveren Funktionen:

- Warm Dim
- Optische Linse zur Entblendung
- Powder Skin Oberfläche


Warm Dim passt sich die Lichtfarbe beim Dimmen automatisch an. Dimme das Licht per Drehdimmer oder GRAU App.

Designed und gefertigt am GRAU Campus in Deutschland.

Farben

Farben	Artikelnummer
 Sand White	FLU1-310-05
 Black	FLU1-310-00
Polished/White	DL00-1
Polished/Black	DL00-0

Dimensionen

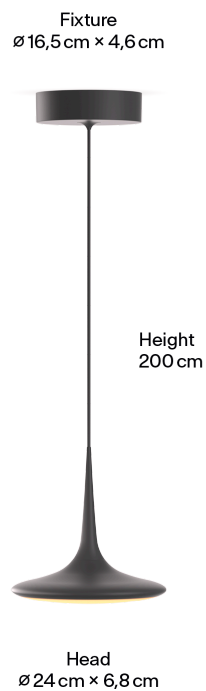

GRAU

Body

Pendellänge	2m
Max. Durchmesser	240
Maße Verpackung (L x B x H)	57cm x 30cm x 21cm
Material	Aluminium
Oberfläche	Pulverbeschichtet
Gewicht	2kg
Gewicht inkl. Verpackung	2,8kg
Montageart	Deckenaufbau
Nennspannung	220–240V
Leistungsaufnahme	16W
Leuchteneffizienz	88lm/W
Anschlussleitung (Ader-Zahl)	3
Schutzklasse	I
Artikelnummer	FLU1-310-05

Licht

Leuchtmittel	LED
Leuchtenlichtstrom	1400lm
Farbwiedergabeindex	CRI >90
Lichtaustritt	Direkt
Abstrahlwinkel	104°
Lichtverteilung	Symmetrisch
Farbtemperatur	2700–2200K
Lichtfarbe	Warmweiß
Dimmbar	Ja
Art der Dimmung	Phasenabschnitt
Warm Dim	Ja
GRAU App Upgrades möglich	Ja
Umbau auf DALI möglich	Ja

GRAU

Falling Leaf

Falling Leaf is the powerful table lighting. Its large lens shines a glare-free light generously across the table. Falling Leaf is made of high-quality aluminum.

Falling Leaf offers a range of clever functions:

- Warm Dim
- Optical lens for glare control
- Powder Skin surface


Warm Dim automatically adjusts the light color when dimming. Dim the light using a rotary dimmer or the GRAU app.

Designed and manufactured at the GRAU Campus in Germany.

Colors

Colors	SKU
 Sand White	FLU1-310-05
 Black	FLU1-310-00
Polished/White	DL00-1
Polished/Black	DL00-0

Dimensions

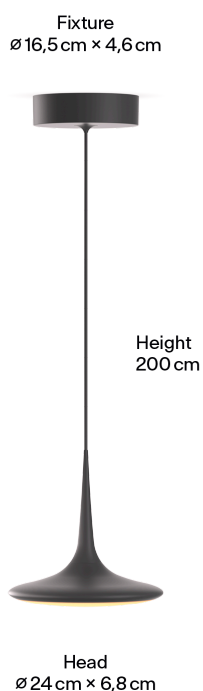

GRAU

Body	Pendant length	2m
	Packaging dimensions (L x W x H)	57cm x 30cm x 21cm
	Material	Aluminum
	Surface	Powder-coated
	Weight	2kg
	Weight incl. packaging	2,8kg
	Mounting type	Ceiling-mounted (surface)
	Rated voltage	220–240V
	Power consumption	16W
	Luminaire efficiency	88lm/W
	Connection cable (number of cores)	3
	Protection class	I
	SKU	FLU1-310-05
Light	Light source	LED
	Luminous flux	1400lm
	Color rendering index	CRI >90
	Light emission	Direct
	Beam angle	104°
	Light distribution	Symmetric
	Color temperature	2700–2200K
	Light color	Warm White
	Dimmable	Yes
	Type of dimming	Trailing edge
	Warm Dim	Yes
	GRAU App upgrades possible	Yes
	Conversion to DALI possible	Yes