

unit mm

## LINFA

designed by Federico Peri

565.21 Sospensione / Pendant

### Collezione / Series

Linfa

### Dimensioni / Dimensions

H. 15 cm x Ø 12 cm / H. 5,9" x Ø 4,7"

### Peso / Weight

0,95 kg / 2 lb

### Materiali / Materials

metal, glass, aluminium

### Voltaggio / Voltage

220-240V

CE  IP40

### Certificazioni / Certifications

CE



















### Sorgente / Source

LED: integrated, 1x 2,7W  
Color Temperature: 2700K  
Nominal flux: 350lm  
Dimmability: phase cut


### Note / Notes

Driver on board  
Available in 110-120V  
DALI version on request

### Finiture / Finishes

Hardware	Glass	
		C24 Hot gold + Clear glass
		C24 Hot gold + White glass
		C24 Hot gold + Smoke glass
		C70 Titanium + Clear glass
		C70 Titanium + White glass
		C70 Titanium + Smoke glass
		C72 Opaque nickel + Clear glass
		C72 Opaque nickel + White glass
		C72 Opaque nickel + Smoke glass



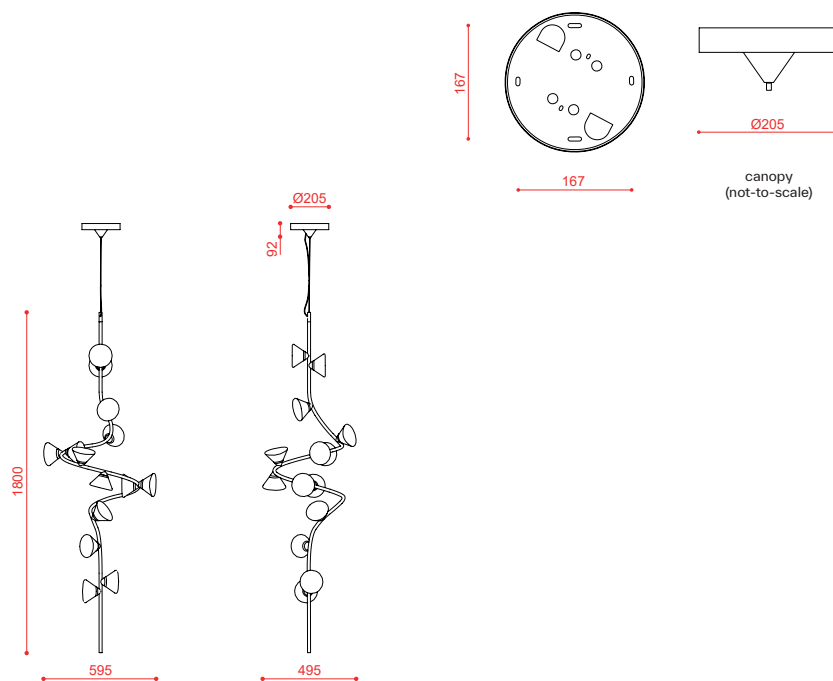

unit mm

## LINFA

designed by Federico Peri

### 565.22b Sospensione / Pendant

#### Collezione / Series

Linfa

#### Dimensioni / Dimensions

H. 180 cm x L. 60 cm / H. 70,8" x L. 23,6"

#### Peso / Weight

6 kg / 13,2 lb

#### Materiali / Materials

metal, glass, aluminium

#### Voltaggio / Voltage

220-240V

CE IP40

#### Certificazioni / Certifications

CE

#### Sorgente / Source

LED: integrated, 14x 2,7W  
Color Temperature: 2700K  
Nominal flux: 4900lm  
Dimmability: phase cut


#### Note / Notes

Driver on board  
Steel cable length 125 cm  
Electric cable length 150cm  
Counterweight available on request (H.15 x Ø4 cm/ H.5,9" x Ø1,6")  
Available in 110-120V  
DALI version on request

#### Finiture / Finishes

Hardware	Glass			
	4	5	5	C24 Hot gold + (Smoke + White + Clear) glass
	4	5	5	C70 Titanium + (Smoke + White + Clear) glass
	4	5	5	C72 Opaque nickel + (Smoke + White + Clear) glass



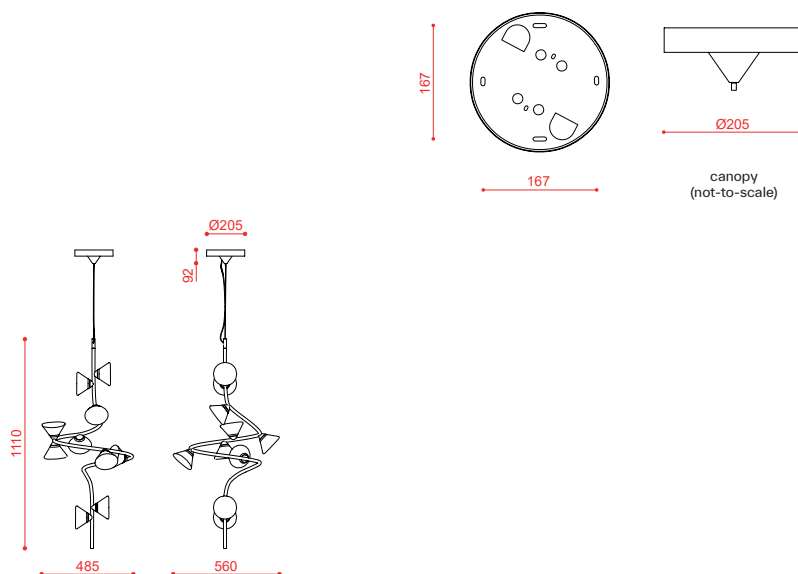

unit mm

## LINFA

designed by Federico Peri

565.22m Sospensione / Pendant

### Collezione / Series

Linfa

### Dimensioni / Dimensions

H. 111 cm x L. 49 cm / H. 43,7" x L. 19,2"

### Peso / Weight

4,5 kg / 10 lb

### Materiali / Materials

metal, glass, aluminium

### Voltaggio / Voltage

220-240V

CE IP40

### Certificazioni / Certifications

CE

### Sorgente / Source

LED: integrated, 10x 2,7W  
Color Temperature: 2700K  
Nominal flux: 3500lm  
Dimmability: phase cut


### Note / Notes

Driver on board  
Steel cable length 125 cm  
Electric cable length 150cm  
Counterweight available on request (H.15 x Ø4 cm/ H.5,9" x Ø1,6")  
Available in 110-120V  
DALI version on request

### Finiture / Finishes

Hardware	Glass			
	3	4	3	C24 Hot gold + (Smoke + White + Clear) glass
	3	4	3	C70 Titanium + (Smoke + White + Clear) glass
	3	4	3	C72 Opaque nickel + (Smoke + White + Clear) glass



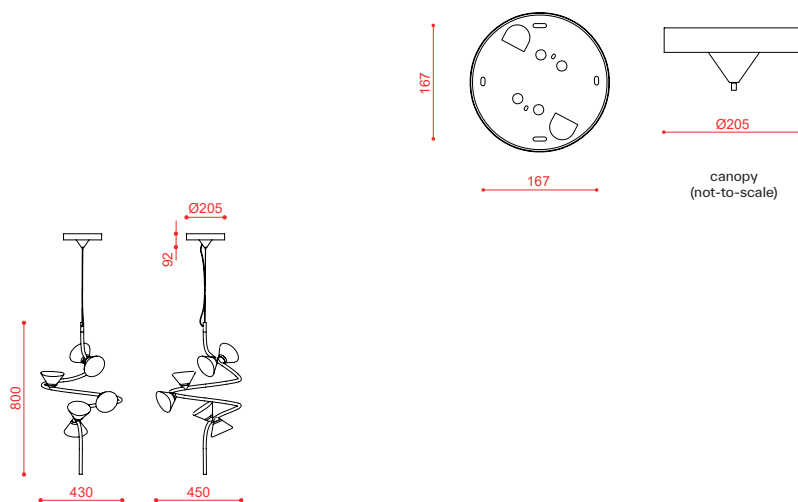

unit mm

## LINFA

designed by Federico Peri

565.22s Sospensione / Pendant

### Collezione / Series

Linfa

### Dimensioni / Dimensions

H. 80 cm x L. 43 cm / H. 31,5" x L. 16,9"

### Peso / Weight

3 kg / 6,6 lb

### Materiali / Materials

metal, glass, aluminium

### Voltaggio / Voltage

220-240V

CE IP40

### Certificazioni / Certifications

CE













### Sorgente / Source

LED: integrated, 6x 2,7W  
Color Temperature: 2700K  
Nominal flux: 2100lm  
Dimmability: phase cut


### Note / Notes

Driver on board  
Steel cable length 125 cm  
Electric cable length 150cm  
Counterweight available on request (H.15 x Ø4 cm/ H.5,9" x Ø1,6")  
Available in 110-120V  
DALI version on request

### Finiture / Finishes

Hardware	Glass		
			
C24 Hot gold	(Smoke + White + Clear) glass		
			
C70 Titanium	(Smoke + White + Clear) glass		
			
C72 Opaque nickel	(Smoke + White + Clear) glass		



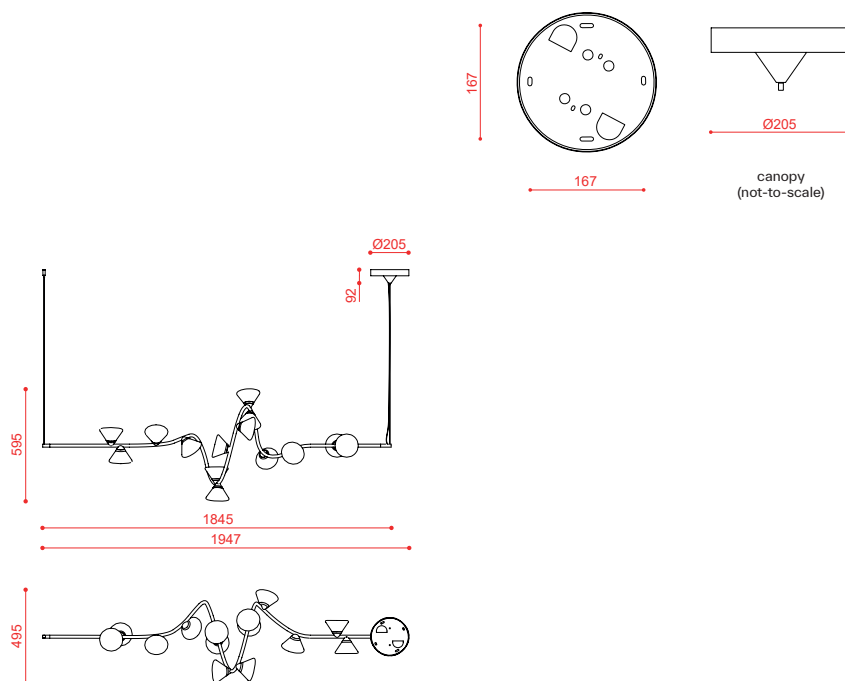

unit mm

## LINFA

designed by Federico Peri

565.23b Sospensione / Pendant

### Collezione / Series

Linfa

### Dimensioni / Dimensions

H. 60 cm x L. 195 cm / H. 23,6" x L. 76,7"

### Peso / Weight

6 kg / 13,2 lb

### Materiali / Materials

metal, glass, aluminium

### Voltaggio / Voltage

220-240V

CE IP40

### Certificazioni / Certifications

CE

### Sorgente / Source

LED: integrated, 14x 2,7W  
Color Temperature: 2700K  
Nominal flux: 4900lm  
Dimmability: phase cut

### Note / Notes

Driver on board  
Steel cable length 125 cm  
Electric cable length 150cm  
Available in 110-120V  
DALI version on request

### Finiture / Finishes

Hardware

Glass


	4	5	5
	4	5	5
	4	5	5

C24 Hot gold + (Smoke + White + Clear) glass

C70 Titanium + (Smoke + White + Clear) glass

C72 Opaque nickel + (Smoke + White + Clear) glass



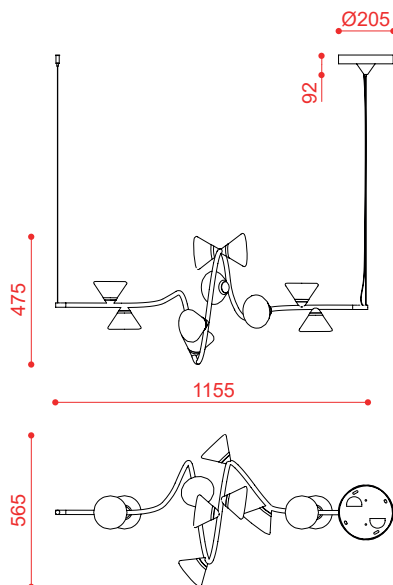

unit mm

## LINFA

designed by Federico Peri

### 565.23m Pendant

#### Series

Linfa

#### Dimensions

H 48 x L 120 x W 57 cm  
/ H 18,9" x L 47,2" x W 22,4"

#### Weight

4,5 Kg / 9,9 lb

#### Materials

metal, aluminum, glass

#### Voltage

220-240V

CE  IP40

#### Certifications

CE

#### Source

Source Type: Integrated LED  
Power: 10 x 2,7W  
Color Temperature: 2700K  
Nominal flux: 3500 lm  
Dimmability: Phase cut

#### Class

Insulation class 1  
Degree of protection IP40


#### Notes

DALI version on request.  
110/120V version available on request  
at an additional cost.

#### Finishes

C24 Hot gold + (White + Clear + smoke) glass,  
C70 Titanium + (Smoke + Clear + white) glass,  
C72 Opaque nickel + (Smoke + White + clear)  
glass



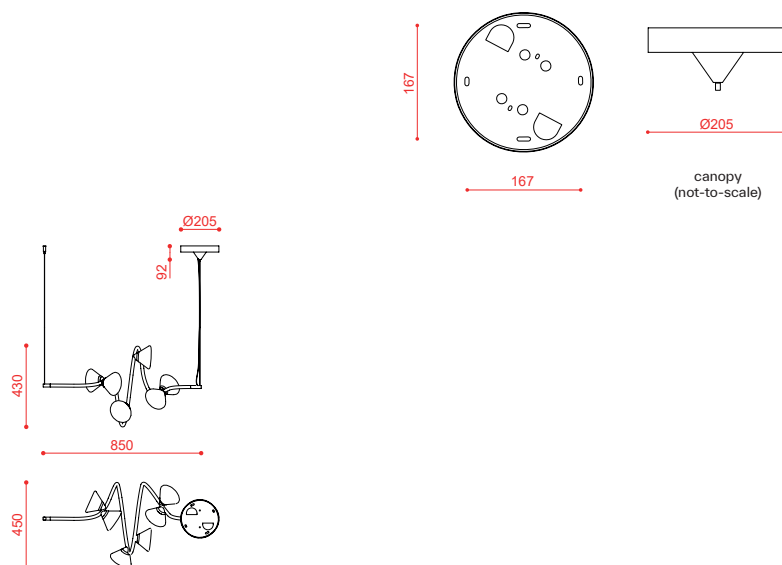

unit mm

## LINFA

designed by Federico Peri

565.23s Sospensione / Pendant

### Collezione / Series

Linfa

### Dimensioni / Dimensions

H. 43 cm x L. 85 cm / H. 16,9" x L. 33,5"

### Peso / Weight

3 kg / 6,6 lb

### Materiali / Materials

metal, glass, aluminium

### Voltaggio / Voltage

220-240V

CE  IP40

### Certificazioni / Certifications

CE




### Sorgente / Source

LED: integrated, 6x 2,7W  
Color Temperature: 2700K  
Nominal flux: 2100lm  
Dimmability: phase cut

### Note / Notes

Driver on board  
Steel cable length 125 cm  
Electric cable length 150cm  
Available in 110-120V  
DALI version on request

### Finiture / Finishes

Hardware	Glass			
	2	2	2	C24 Hot gold + (Smoke + White + Clear) glass
	2	2	2	C70 Titanium + (Smoke + White + Clear) glass
	2	2	2	C72 Opaque nickel + (Smoke + White + Clear) glass

