


# LONGO STORAGE UNITS


— By Ramos&Bassols —




**CREDENZA UNITS**



LNA12

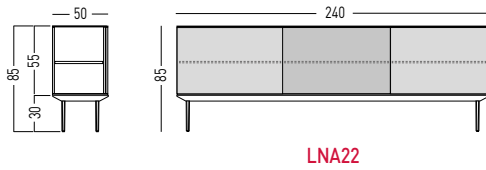


LNA22

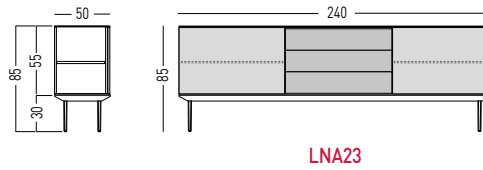


LNA23


**STORAGE UNITS**

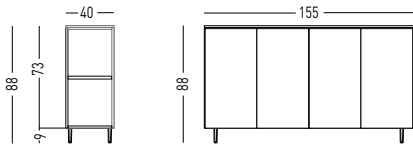


LNA51



LNA52

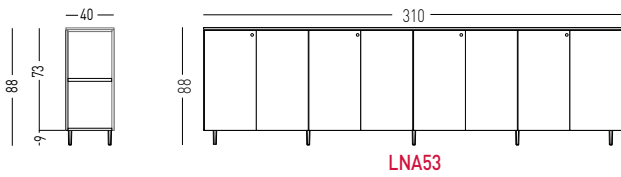

LNA53

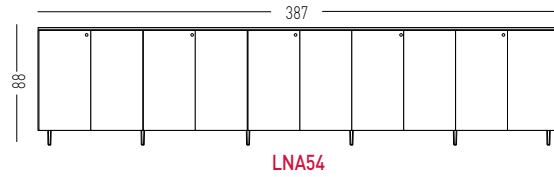

LNA54




#### AUXILIARY CREDENZA AND STORAGE UNITS - TECHNICAL FEATURES

- 1 MFC Top Cover 19 mm thickness.
- 2 MFC base, 19 mm thickness.
- 3 MFC Vertical Separators 19 mm thickness, Back panel 16 mm thickness.
- 4 Glass sliding door in White or Black Glass 10 mm.
- 5 Thermoplastic runner inserted in the base. Plane base without any obstacle.
- 6 Die Cast profiles in White, Black and Silver Finishes.
- 7 Die Cast union squares in White, Black and Silver.
- 8 Die Cast aluminum feet in White, Black, silver and polished finishes with PVC anti-skid pad.

#### LONGO AUXILIARY CREDENZA AND STORAGE UNITS PROGRAM

##### 2 Sliding door model



LNA12




**AUXILIARY CREENZA AND STORAGE UNITS - TECHNICAL FEATURES**

- ① MFC Top Cover 19 mm thickness
- ② MFC base, 19 mm thickness.
- ③ MFC Vertical Separators 19 mm thickness, Back panel 16 mm thickness
- ④ Shelves 19 mm thickness
- ⑤ 16 mm thickness MFC sliding door.
- ⑥ Thermoplastic runner inserted in the base. Plane base without any obstacle.
- ⑦ Die Cast profiles in White, Black, Silver and Polished Finishes
- ⑧ Die Cast union squares in White, Black, Silver and Polished
- ⑨ Die Cast aluminum feet in White, Black and silver finishes with PVC anti-skid pad.


**LONGO AUXILIARY CREENZA AND STORAGE UNITS PROGRAM**

**3 Sliding door model**

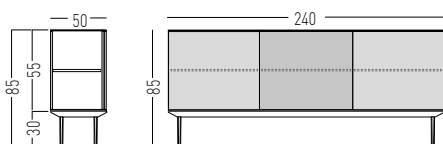

**LNA22**

**2 Sliding door model and 3 drawers**

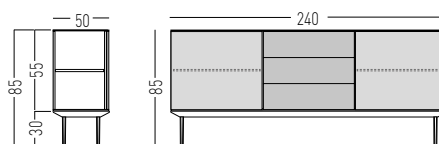


**LNA23**



#### AUXILIARY STORAGE UNITS - TECHNICAL FEATURES

- ❶ MFC Visible Top Cover 10 mm thickness. MFC invisible Top Cover 19 mm thickness.
- ❷ MFC base, 19 mm thickness.
- ❸ Lateral panels, MFC 16 mm thickness.
- ❹ Visible Back panel 16 mm thickness.
- ❺ MFC Vertical Separators 30 mm thickness.
- ❻ Shelves are manufactured by mfc 19 mm thickness.
- ❼ MFC Door jamb 16 mm or in White or Black Glass 5 mm thickness. Hinges with three-dimensional regulation and automatic assembly. Soft closing system hinges.
- ❽ Top security lock.
- ❾ Die Cast aluminum feet in White, Black, silver and polished finishes with PVC anti-skid pad.

#### LONGO STORAGE UNITS PROGRAM

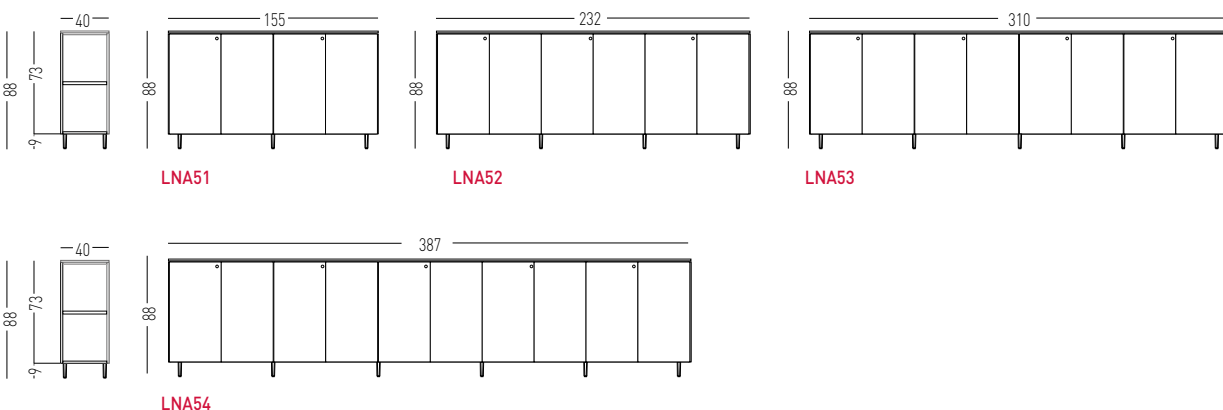



**MATERIALS**

Maximum use of materials to eliminate and minimize scraps. Use of recyclable and recycled materials in those components that do not affect the functionality and durability.

**HIGH%**  
RECYCLED  
MATERIALS



**PRODUCTION**

Maximum optimization of energy use. Minimal environmental impact. Last generation technological systems. Zero discharge of wastewater. No VOC coatings. Processes free of heavy metals, phosphates, OC and COD.

**100%**  
RECYCLABLE  
ALUMINIUM, STEEL  
& WOOD



**TRANSPORT**

Detachable systems. Volumes that facilitate the optimization of space. Maximum reduction of energy consumption by transport.

**100%**  
RECYCLABLE  
PACKAGE AND THINNER  
FREE



**USE**

Quality and warranty. Long lasting. Replacements available.

**EASY**  
TO CLEAN  
AND MAINTAIN



**DISPOSAL**

Waste reduction. Supplier-manufacturer packaging reuse system. Components are easy to be separated. Inks in packaging are water-based, without solvents.

**HIGH%**  
RECYCLABLE  
MATERIALS

**■ CERTIFICATES AND REFERENCES**

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).

 The mark of responsible forestry	 PEFC Certificate	 EN ISO 14006:2011 ECODESIGN Certificate	 UNE-EN ISO 9001:2008 ISO 9001 Certificate	 UNE-EN ISO 14001:2004 ISO 14001 Certificate	 UNE-EN ISO 14001:2004 ISO 14001 Certificate	 E1 Certificate by EN 13986	 ACTIU TECHNOLOGY PARK LEED® PLATINUM certified by USGBC Leadership in Energy & Environmental Design <small>LEED® Gold certified 2011 · LEED® Platinum certified 2017</small>
--	---	---	---	---	---	---	--